
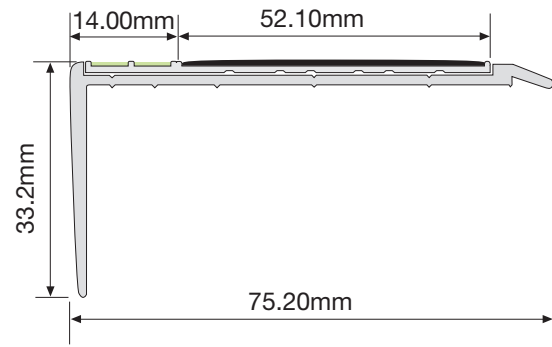


Product Data Sheet - Step Nosing F15-175

2021 V2

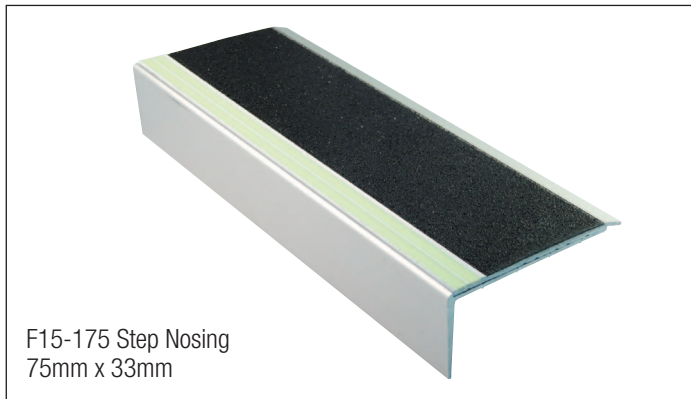

The F15-175 Step Nosing is designed to ensure visibility of steps in escape routes for compliance with NCC 2019 EP4.1 Visibility in an Emergency requirements. The step nosing will be effective in all light conditions including during failure of the main lighting.

COMPLIANCE

Independently tested in accordance with UL 1994 for 10 metre visibility to meet NCC 2019 BCA Vol. 1 Clause EP4.1 Visibility in an Emergency. The F15-175 Step Nosing can also be used to meet AS 1428.1, clause 11.1* d, e, f** and g.

* Due to varying interpretations of this clause it is advisable to check with your local certifier as to the suitability of this product.

**Black Anti-slip has 5% reflectance, suitable for surfaces with reflectance 17% or greater. Eg concrete, most outdoor timber, and most indoor and outdoor pale-looking surfaces.

Note: Custom colours are available to meet AS1428.1 luminance contrast for any surface colour. Compliance with AS1428.1 means the F15-175 Step Nosing complies with NCC D3.3(a)(ii) and (iii), required for ALL stairways in all buildings required to be accessible. Complies with NCC D2.13(v)(B) which requires a minimum P3 in dry conditions and P4 in wet conditions.

PERFORMANCE

30 Minute Evacuation Time

Minimum charging illuminance of 20 lux for 5 minutes will ensure visibility for 30 minutes after failure of the main lighting.

90 Minute Evacuation Time

Minimum charging illuminance of 60 lux for 5 minutes will ensure visibility for 90 minutes after failure of the main lighting.

120 Minute Evacuation Time

Minimum charging illuminance of 80 lux for 5 minutes will ensure visibility for 120 minutes after failure of the main lighting.

Outdoor and daylight installations will absorb enough natural light to be visible throughout the longest winter night.

The Step Nosing is suitable for use indoors and outdoors. The anti-slip material provides all weather protection from slips and falls.

Operating Temperature Range: -20°C to +40°C*

* For controlled environment (constant temperature) rooms below 0°C contact Ecoglo.

Anti-slip Properties - AS/NZS 4586-2004 Classification: Dry: F Wet: V Ramp: R12 AS 4586-2013 Classification: P5

UV Resistance - Loss of luminance after 1000 hrs ASTM G-155 Cycle 1 exposure: <10%: Pass

Salt Spray Resistance – ASTM B117: Pass

Washability - ASTM D4828: Pass

Rate of Burning – ASTM D635: Pass

Surface Flammability – ASTM E162: Pass

Toxicity – Bombardier Toxic Gas Generation Test SMP800-C: Pass

Radioactivity – ASTM D3648: Pass

High Temperature Curing: Pass

SUPPLY

The products are available in lengths of 100mm increments from 800mm to 1500mm. Custom lengths can also be fabricated on site or in the factory from 2.45 metre or 3.06 metre lengths.

COMPOSITION

The Step Nosing profile consists of 6060T5 aluminium extrusion, anodized (silver colour) to 20 microns thickness. The Ecoglo high visibility inserts are adhesively fixed into the extrusion. The high visibility inserts are manufactured from extruded 6063T5 aluminium section. Silicon Carbide anti-slip materials and custom made photoluminescent pigment are embedded in thermoset polyester carriers to integrally bond the active ingredients into the aluminium following curing at high temperature. The photoluminescent area is also recessed into protective channels.



INSTALLATION

The F15-175 Step Nosing can be used on a range of substrates including concrete, timber, tiles, vinyl, steel, and checker plate. Uni-clamp assemblies can be used for installation onto steel mesh steps.

Maximum recommended length for outdoor installation is 1500mm.

Installation needs to be carried out strictly in accordance with the Ecoglo installation instructions.

Consult Installation Instructions on website for full details and surface preparation.

PRODUCT CODE	PRODUCT DESCRIPTION	PRODUCT LENGTH
F15-175-800	Step Nosing 75mm x 33mm	800mm
F15-175-900	Step Nosing 75mm x 33mm	900mm
F15-175-1000	Step Nosing 75mm x 33mm	1000mm
F15-175-1100	Step Nosing 75mm x 33mm	1100mm
F15-175-1200	Step Nosing 75mm x 33mm	1200mm
F15-175-1300	Step Nosing 75mm x 33mm	1300mm
F15-175-1400	Step Nosing 75mm x 33mm	1400mm
F15-175-1500	Step Nosing 75mm x 33mm	1500mm

Contact

Ecoglo Australia

Ground Floor, 470 St. Kilda Road, Melbourne VIC 3004

Phone: +61 3 8691 5288

Email: Australia@ecoglo.com **Web:** www.ecoglo.com.au